

# Ferrite for Telecommunication

## Toroidal Cores T Series


TDK toroidal cores find use in many kinds of device—pulse transformers, delay lines, R. F. coils, converter transformers, wideband transformers, impedance—matching transformers and the like. The variety of TDK materials, of which the TDK cores are made, provides a truly wide range of cores for the user's selection.

The core meeting user's requirement for duty anywhere between the audio range and about 20MHz will be readily found in the TDK toroidal core line.




### ORDERING CODE SYSTEMS

#### For general use

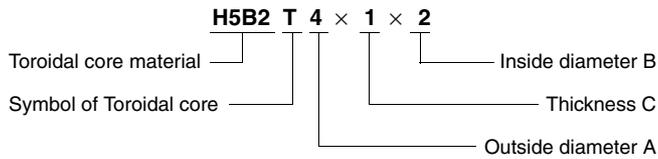


#### For LAN pulse transformers

(This ordering code system is used for only DNW45 items.)

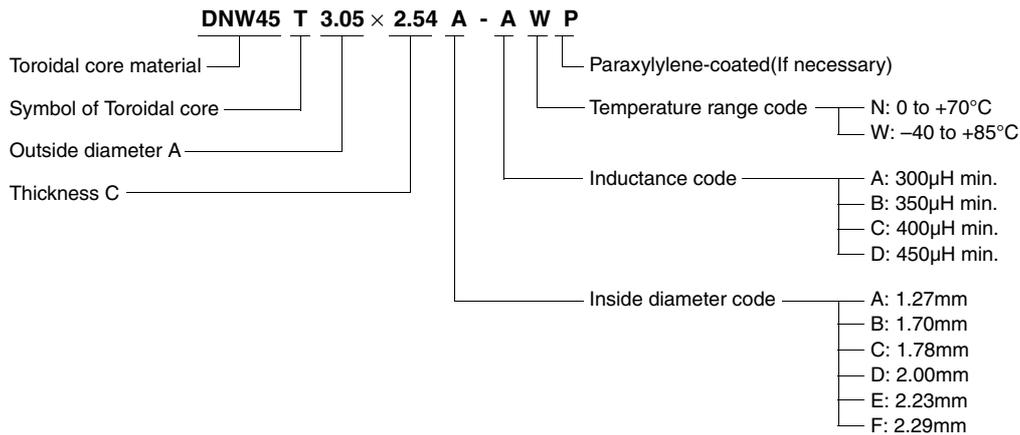

## FOR GENERAL USE

### DIMENSIONS/PARAMETERS AND AL-VALUE

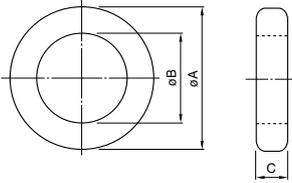


Type ( $\phi A \times C \times \phi B$ )	Dimensions in mm			Parameters		
	$\phi A$	$\phi B$	C	$C_1$ ( $\text{mm}^{-1}$ )	Ae ( $\text{mm}^2$ )	$\ell e$ (mm)
T3.05×1.27×1.27	3.05	1.27	1.27	5.65	1.06	5.99
T4×1×2	4.00	2.00	1.00	9.06	0.961	8.71
T3.94×1.27×2.23	3.94	2.23	1.27	8.69	1.06	9.19
T4.83×1.27×2.29	4.83	2.29	1.27	6.63	1.54	10.2
T6×1.5×3	6.00	3.00	1.50	6.04	2.16	13.1
T5.84×1.52×3.05	5.84	3.05	1.52	6.34	2.05	13.0
T8×2×4	8.00	4.00	2.00	4.53	3.84	17.4
T10×2.5×5	10.0	5.00	2.50	3.63	6.01	21.8
T12×3×6	12.0	6.00	3.00	3.02	8.65	26.1
T14×3.5×7	14.0	7.00	3.50	2.59	11.8	30.5
T20×5×10	20.0	10.0	5.00	1.81	24.0	43.6
T20×7.5×14.5	20.0	14.5	7.50	2.61	20.4	53.3
T28×13×16	28.0	16.0	13.0	0.864	76.0	65.6
T31×8×19	31.0	19.0	8.00	1.60	47.1	75.5
T38×14×22	38.0	22.0	14.0	0.821	109	89.7
T44.5×13×30	44.5	30.0	13.0	1.23	93.0	114

Type ( $\phi A \times C \times \phi B$ )	AL-value (nH/N <sup>2</sup> )					
	HP5	H5B2	H5C3	PC40	H5A	H5C2
T3.05×1.27×1.27	1100±20%	1700±25%	3340±30%			
T4×1×2	670±20%	1000±25%	2000±30%			
T3.94×1.27×2.23	720±20%	1080±25%	2170±30%			
T4.83×1.27×2.29	950±20%	1400±25%	2840±30%			
T6×1.5×3	1000±20%	1500±25%	3000±30%			
T5.84×1.52×3.05	990±20%	1480±25%	2960±30%			
T8×2×4	1330±20%	2000±25%	4000±30%			
T10×2.5×5	1670±20%	2500±25%	5000±30%			
T12×3×6				1020±25%	1400±25%	3600±25%
T14×3.5×7				1200±25%	1650±25%	4200±25%
T20×5×10				1750±25%	2350±25%	6000±30%
T20×7.5×14.5				1050±25%	1800±25%	4100±30%
T28×13×16						14000±30%
T31×8×19						7700±30%
T38×14×22						13160±30%
T44.5×13×30						10000±30%

- Can be coated with epoxy or paraxyllylene.
- If epoxy or paraxyllylene-coated products are desired, please suffix P or E to part No. when ordering.  
Above T10 (outside diameter 10mm min.): Epoxy Coating "E"  
Up to T8 (outside diameter 8mm max.): Paraxyllylene "P"
- Insulation withstanding voltage of coating product: DC.1000V min. for 1 second.
- Measuring conditions:  
HP5, H5B2, H5C2, H5C3: 10kHz, 10mV, 10Ts  
PC40: 100kHz, 10mV, 10Ts  
H5A: 50kHz, 10mV, 10Ts

## FOR LAN PULSE TRANSFORMERS

### DIMENSIONS/PARAMETERS AND AL-VALUE

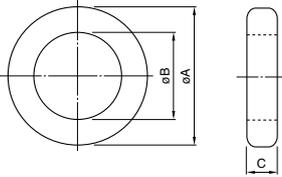

Type (øA×C×øB)	Dimensions in mm			Parameters		
	øA	øB	C	C <sub>1</sub> (mm <sup>-1</sup> )	A <sub>e</sub> (mm <sup>2</sup> )	l <sub>e</sub> (mm)
<b>T3.05×1.27A</b>	3.05±0.2	1.27±0.2	1.27±0.2	5.65	1.06	5.99
<b>T3.05×2.54A</b>	3.05±0.2	1.27±0.2	2.54±0.2	2.82	2.12	5.99
<b>T3.4×1.5B</b>	3.40±0.2	1.70±0.2	1.50±0.2	6.04	1.23	7.40
<b>T3.4×2.5B</b>	3.40±0.2	1.70±0.2	2.50±0.2	3.63	2.04	7.40
<b>T3.94×1.27C</b>	3.94±0.2	1.78±0.2	1.27±0.2	6.23	1.30	8.10

Part No.	Number of turns								AL-value (nH/N <sup>2</sup> )
	Temperature range code: N[0 to 70°C]				Temperature range code: W[-40 to +85°C]				
	Inductance code[at DC.8mA]				Inductance code[at DC.8mA]				
	A:300µH min.	B:350µH min.	C:400µH min.	D:450µH min.	A:300µH min.	B:350µH min.	C:400µH min.	D:450µH min.	
<b>DNW45T3.05×1.27A-AN</b>	26Ts	—	—	—	—	—	—	—	930±25%
<b>DNW45T3.05×1.27A-BN</b>	—	30Ts	—	—	—	—	—		
<b>DNW45T3.05×1.27A-AW</b>	—	—	—	—	30Ts	—	—		
<b>DNW45T3.05×2.54A-AN</b>	16Ts	—	—	—	—	—	—	1870±25%	
<b>DNW45T3.05×2.54A-BN</b>	—	18Ts	—	—	—	—	—		
<b>DNW45T3.05×2.54A-DN</b>	—	—	—	20Ts	—	—	—		
<b>DNW45T3.05×2.54A-AW</b>	—	—	—	—	16Ts	—	—		
<b>DNW45T3.05×2.54A-BW</b>	—	—	—	—	—	18Ts	—		
<b>DNW45T3.05×2.54A-CW</b>	—	—	—	—	—	—	20Ts	—	
<b>DNW45T3.05×2.54A-DW</b>	—	—	—	—	—	—	—	22Ts	
<b>DNW45T3.4×1.5B-AN</b>	24Ts	—	—	—	—	—	—	870±25%	
<b>DNW45T3.4×1.5B-BN</b>	—	26Ts	—	—	—	—	—		
<b>DNW45T3.4×1.5B-CN</b>	—	—	30Ts	—	—	—	—		
<b>DNW45T3.4×1.5B-DN</b>	—	—	—	32Ts	—	—	—		
<b>DNW45T3.4×1.5B-AW</b>	—	—	—	—	26Ts	—	—		
<b>DNW45T3.4×1.5B-BW</b>	—	—	—	—	—	28Ts	—	—	
<b>DNW45T3.4×1.5B-CW</b>	—	—	—	—	—	—	32Ts	—	
<b>DNW45T3.4×2.5B-AN</b>	18Ts	—	—	—	—	—	—	1460±25%	
<b>DNW45T3.4×2.5B-BN</b>	—	20Ts	—	—	—	—	—		
<b>DNW45T3.4×2.5B-DN</b>	—	—	—	22Ts	—	—	—		
<b>DNW45T3.4×2.5B-AW</b>	—	—	—	—	18Ts	—	—		
<b>DNW45T3.4×2.5B-BW</b>	—	—	—	—	—	20Ts	—		
<b>DNW45T3.4×2.5B-CW</b>	—	—	—	—	—	—	22Ts	—	
<b>DNW45T3.4×2.5B-DW</b>	—	—	—	—	—	—	—	24Ts	
<b>DNW45T3.94×1.27C-AN</b>	24Ts	—	—	—	—	—	—	850±25%	
<b>DNW45T3.94×1.27C-BN</b>	—	26Ts	—	—	—	—	—		
<b>DNW45T3.94×1.27C-CN</b>	—	—	30Ts	—	—	—	—		
<b>DNW45T3.94×1.27C-DN</b>	—	—	—	32Ts	—	—	—		
<b>DNW45T3.94×1.27C-AW</b>	—	—	—	—	24Ts	—	—		
<b>DNW45T3.94×1.27C-BW</b>	—	—	—	—	—	28Ts	—	—	
<b>DNW45T3.94×1.27C-CW</b>	—	—	—	—	—	—	30Ts	—	
<b>DNW45T3.94×1.27C-DW</b>	—	—	—	—	—	—	—	34Ts	

• Test conditions Inductance: 100kHz, Erms 100mV, DC.8mA,  
AL-value: 100kHz, Erms 100mV, 10Ts, DC.0A, 25°C

• Can be coated with paraxyllylene(Thickness of coating: 12.5µm typ.). Please suffix "P" to the part number when ordering.

• Insulation withstanding voltage of coated product: DC.1000V min. for 1 second.

Type ( $\phi A \times C \times \phi B$ )	Dimensions in mm			Parameters		
	$\phi A$	$\phi B$	C	C <sub>1</sub> (mm <sup>-1</sup> )	A <sub>e</sub> (mm <sup>2</sup> )	ℓ <sub>e</sub> (mm)
T3.94×1.78C	3.94±0.2	1.78±0.2	1.78±0.2	4.44	1.82	8.10
T3.94×1.27E	3.94±0.2	2.23±0.2	1.27±0.2	8.69	1.06	9.19
T3.94×1.78E	3.94±0.2	2.23±0.2	1.78±0.2	6.20	1.48	9.19
T4×1D	4.0±0.2	2.0±0.2	1.0±0.15	9.06	0.96	8.71
T4×2D	4.0±0.2	2.0±0.2	2.0±0.2	4.53	1.92	8.71
T4.83×1.27F	4.83±0.3	2.29±0.2	1.27±0.2	6.63	1.54	10.2

Part No.	Number of turns				Temperature range code: W[-40 to +85°C]				AL-value (nH/N <sup>2</sup> )
	Temperature range code: N[0 to 70°C]				Inductance code[at DC.8mA]				
	Inductance code[at DC.8mA]				Inductance code[at DC.8mA]				
	A:300μH min. B:350μH min. C:400μH min. D:450μH min.				A:300μH min. B:350μH min. C:400μH min. D:450μH min.				
DNW45T3.94×1.78C-AN	20Ts	—	—	—	—	—	—	—	1190±25%
DNW45T3.94×1.78C-BN	—	22Ts	—	—	—	—	—		
DNW45T3.94×1.78C-CN	—	—	24Ts	—	—	—	—		
DNW45T3.94×1.78C-DN	—	—	—	26Ts	—	—	—		
DNW45T3.94×1.78C-AW	—	—	—	—	20Ts	—	—	—	1190±25%
DNW45T3.94×1.78C-BW	—	—	—	—	—	22Ts	—	—	
DNW45T3.94×1.78C-CW	—	—	—	—	—	—	24Ts	—	
DNW45T3.94×1.78C-DW	—	—	—	—	—	—	—	26Ts	
DNW45T3.94×1.27E-AN	30Ts	—	—	—	—	—	—	—	610±25%
DNW45T3.94×1.27E-BN	—	34Ts	—	—	—	—	—	—	
DNW45T3.94×1.27E-CN	—	—	36Ts	—	—	—	—	—	
DNW45T3.94×1.27E-DN	—	—	—	40Ts	—	—	—	—	
DNW45T3.94×1.27E-AW	—	—	—	—	30Ts	—	—	—	610±25%
DNW45T3.94×1.27E-BW	—	—	—	—	—	34Ts	—	—	
DNW45T3.94×1.27E-CW	—	—	—	—	—	—	40Ts	—	
DNW45T3.94×1.27E-DW	—	—	—	—	—	—	—	40Ts	
DNW45T3.94×1.78E-AN	24Ts	—	—	—	—	—	—	—	850±25%
DNW45T3.94×1.78E-BN	—	26Ts	—	—	—	—	—	—	
DNW45T3.94×1.78E-CN	—	—	28Ts	—	—	—	—	—	
DNW45T3.94×1.78E-DN	—	—	—	30Ts	—	—	—	—	
DNW45T3.94×1.78E-AW	—	—	—	—	26Ts	—	—	—	850±25%
DNW45T3.94×1.78E-BW	—	—	—	—	—	28Ts	—	—	
DNW45T3.94×1.78E-CW	—	—	—	—	—	—	30Ts	—	
DNW45T3.94×1.78E-DW	—	—	—	—	—	—	—	32Ts	
DNW45T4×1D-AN	30Ts	—	—	—	—	—	—	—	580±25%
DNW45T4×1D-BN	—	34Ts	—	—	—	—	—	—	
DNW45T4×1D-CN	—	—	38Ts	—	—	—	—	—	
DNW45T4×1D-DN	—	—	—	30Ts	—	—	—	—	
DNW45T4×1D-AW	—	—	—	—	32Ts	—	—	—	580±25%
DNW45T4×1D-BW	—	—	—	—	—	36Ts	—	—	
DNW45T4×2D-AN	20Ts	—	—	—	—	—	—	—	
DNW45T4×2D-BN	—	22Ts	—	—	—	—	—	—	
DNW45T4×2D-CN	—	—	24Ts	—	—	—	—	—	1160±25%
DNW45T4×2D-DN	—	—	—	26Ts	—	—	—	—	
DNW45T4×2D-AW	—	—	—	—	20Ts	—	—	—	
DNW45T4×2D-BW	—	—	—	—	—	22Ts	—	—	
DNW45T4×2D-CW	—	—	—	—	—	—	24Ts	—	1160±25%
DNW45T4×2D-DW	—	—	—	—	—	—	—	26Ts	
DNW45T4.83×1.27F-AN	24Ts	—	—	—	—	—	—	—	
DNW45T4.83×1.27F-BN	—	26Ts	—	—	—	—	—	—	
DNW45T4.83×1.27F-CN	—	—	28Ts	—	—	—	—	—	800±25%
DNW45T4.83×1.27F-DN	—	—	—	30Ts	—	—	—	—	
DNW45T4.83×1.27F-AW	—	—	—	—	26Ts	—	—	—	
DNW45T4.83×1.27F-BW	—	—	—	—	—	28Ts	—	—	
DNW45T4.83×1.27F-CW	—	—	—	—	—	—	30Ts	—	800±25%
DNW45T4.83×1.27F-DW	—	—	—	—	—	—	—	32Ts	

• Test conditions Inductance: 100kHz, Erms 100mV, DC.8mA,

AL-value: 100kHz, Erms 100mV, 10Ts, DC.0A, 25°C

• Can be coated with paraxylolene(Thickness of coating: 12.5μm typ.). Please suffix "P" to the part number when ordering.

• Insulation withstanding voltage of coated product: DC.1000V min. for 1 second.

The attached diagram indicates the relationship between flux density ( $\Delta B$ ) and field intensity ( $H$ ) under impressed pulse voltage. Therefore, pulse inductance ( $L_p$ ), pulse permeability ( $\mu_p$ ) and core shape values are obtainable as shown on the diagram.

#### HOW TO OBTAIN PULSE INDUCTANCE( $L_p$ ) AND PERMEABILITY ( $\mu_p$ ):

Given the impressed voltage  $E$ (V), pulse width  $\tau$ (sec.) and number of turns  $N$ (t), the excitation current  $i_p$ (A) is obtained if the core shape is determined. Next, as the excitation current  $i_p$  is now known, the values for  $L_p$  and  $\mu_p$  are obtained from the following formulas. Here, the values for  $\Delta B$  and  $H$  are obtained from the attached graph:

$$\Delta B = \frac{E \cdot \tau}{N \cdot A_e} \times 10^9 \text{ (mT)} \quad i_p = \frac{H \cdot \ell_e}{N} \text{ (A)} \quad \mu_p = \frac{L_p \cdot \ell_e}{4\pi N^2 A_e} \times 10^{10}$$

$$H = \frac{N \cdot i_p}{\ell_e} \times 10^3 \text{ (A/m)} \quad L_p = \frac{E \cdot \tau}{i_p} \text{ (H)}$$

Example: Pulse inductance  $L_p$  and pulse permeability  $\mu_p$  will be obtained as follows if pulse impression voltage  $E$  equals 5V, pulse width  $\tau$  equals 2 $\mu$ sec., number of turns  $N$  equals 20 turns, and assuming the Toroidal core T6 $\times$ 1.5 $\times$ 3 of 5000 permeability is used. ( $A_e=2.16\text{mm}^2$ ,  $\ell_e=13.1\text{mm}$ )

$$\Delta B = \frac{5 \times 2 \times 10^{-6}}{20 \times 2.2} \times 10^9 = 227 \text{ mT}$$

Therefore,  $H$  equals 51A/m can be read from the intersection of the curves for  $\Delta B$  equals 227mT and HP5. Consequently, the excitation current  $i_p$  will be:

$$i_p = \frac{51 \times 13.1}{20} = 33.4 \text{ mA}$$

The values for  $L_p$  and  $\mu_p$  will then be:  $L_p = \frac{5 \times 2 \times 10^{-6}}{33.4 \times 10^{-3}} = 330 \mu\text{H}$   $\mu_p = \frac{0.30 \times 10^{-3} \times 13.1}{4\pi \cdot 20^2 \cdot 2.2} \times 10^{10} = 3555$

#### HOW CORE IS SHAPED:

Assuming, from the design standpoint, that the magnetic flux value  $\Delta B$  has been confirmed; if material of known qualities is used, the field intensity  $H$  can be obtained from the graph. If the values of impressed voltage  $E$ (V), pulse width  $\tau$ (sec.) and excitation current  $i_p$  are known, optimum core shape is obtained through the value of  $\ell_e/A_e$  as given by the following formula as long as the number or turns  $N$  is determined.

$$\frac{\ell_e}{A_e} = \frac{N^2 \cdot i_p}{E \cdot \tau} \cdot \frac{\Delta B}{H} \cdot 10^{-6}$$

When magnetic flux density  $\Delta B$  equals 227mT, field intensity  $H$  equals 51A/m,  $E$  equals 5V,  $\tau$  equals 2 $\mu$ sec.,  $i_p$  equals 33.4mA and  $N$  equals 20 turns, and if Toroidal HP 4,000 cores are used, the value  $\ell_e/A_e$  for optimum cores will be:

$$\frac{\ell_e}{A_e} = \frac{20^2 \times 33.4 \times 10^{-3}}{5 \times 2 \times 10^{-6}} \times \frac{227 \times 10^{-6}}{51} = 5.95 \text{ mm}^{-1}$$

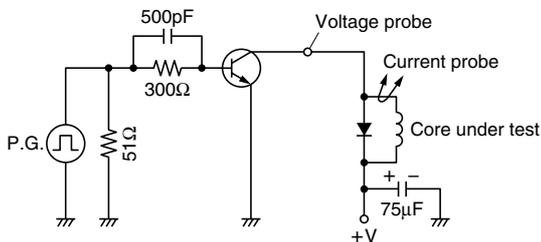


Fig.1 Test circuit

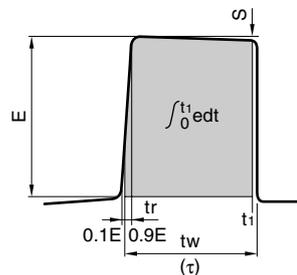


Fig.2 Pulse waveform


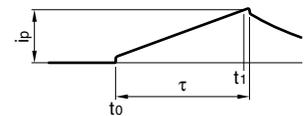



Fig.3 Current waveform

### TYPICAL PULSE DRIVEN CHARACTERISTICS

#### HP5

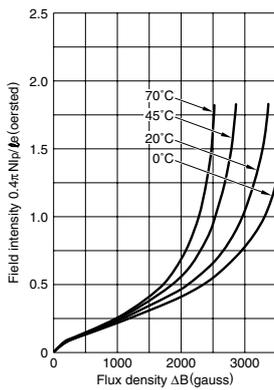


#### H5B2

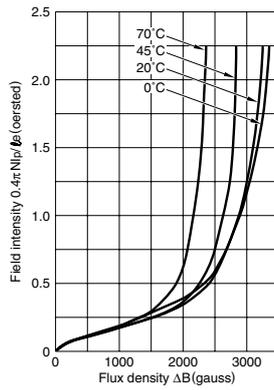

### TYPICAL TEMPERATURE CHARACTERISTICS OF PULSE DRIVING


#### HP5

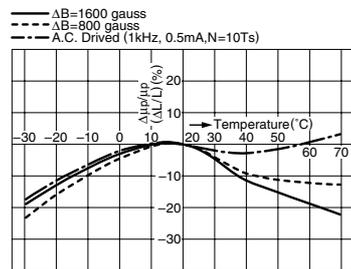

Test condition  
 Pulse width: 2μsec.  
 Repetition frequency 10kHz

#### H5B2


- 1. H5B2T2×4×1 (—  $\mu_p=6500$  at 20°C,  $\Delta B=850$  gauss  
 - - -  $\mu_p=5550$  at 20°C,  $\Delta B=1700$  gauss  
 $\mu_i=6300$ )
- 2. H5B2T3×6×1.5 (—  $\mu_p=6550$  at 20°C,  $\Delta B=850$  gauss  
 - - -  $\mu_p=5900$  at 20°C,  $\Delta B=1700$  gauss  
 $\mu_i=6300$ )

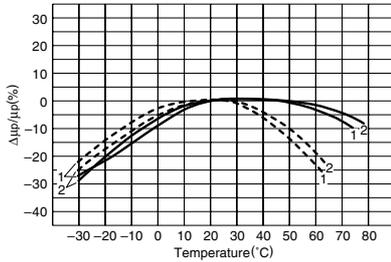

Test condition  
 Pulse width: 2μsec.  
 Repetition frequency 5kHz

#### H5C2

- $\Delta B=1000$  gauss
- - -  $\Delta B=500$  gauss
- · - · A.C. Driven (1kHz, 0.5mA, N=10Ts)

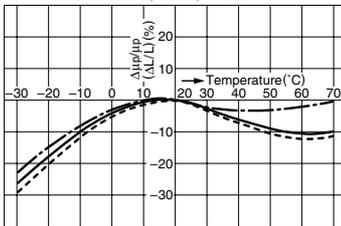

Test condition  
 Pulse width: 2μsec.  
 Repetition frequency 10kHz

This is indicated as the standardized value per turn of the typical frequency characteristic of the parallel resistance. Parallel resistance  $R_p$  of a chosen material and core size at certain frequency can be calculated by the following formula:

$$R_p = \frac{\text{Reading from the graph of } C_1 \cdot R_p / N^2}{C_1 \text{ of the chosen core}} \times N^2 (\Omega)$$

And  $C_1$  means core factor  $l_e/A_e$  ( $\text{mm}^{-1}$ ). Those for non-standard cores are calculated by the following formula:

$$C_1 = \frac{2\pi}{C \cdot \ln \frac{A}{B}}$$

where, A : outside diameter (mm)


B : inside diameter (mm)

C : thickness (mm)

Parallel resistance is related to series resistance by the following formula.

$$R_s = \frac{R_p}{(1+2)} (\Omega)$$

#### H5B2

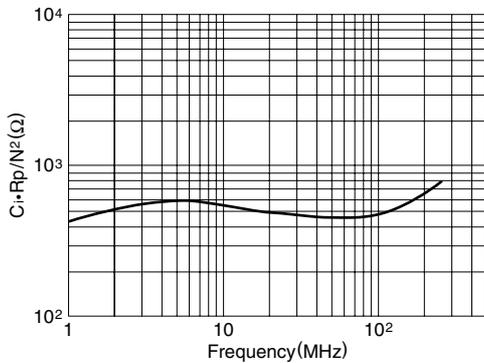

#### HP5

